# CORFLUTE/FOAMBOARD SIGNS




#### Are Eyelets Needed?

Eyelets are 10mm. Place a 3mm magenta dot (or contrasting colour) on the artwork 15mm from edges and/or corners where required. Usually one in each corner and every 500mm.

### STANDARD SIZES

450 x 600mm 450 x 900mm 600 x 900mm 900 x 1220mm 2440 x 1220mm Custom Sizes Avail.

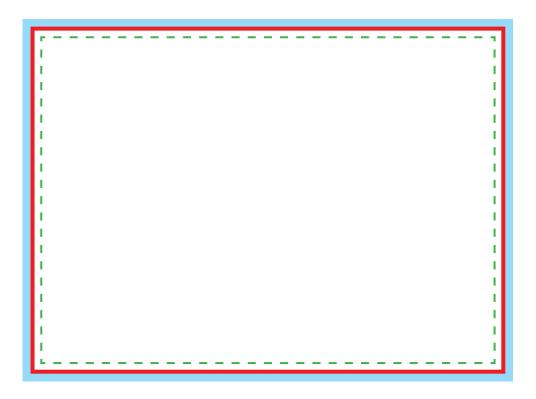

#### BLEED AREA 20mm Extend backgrounds and images on the edges past

the trim line and to the edge of the bleed area.

## TRIM LINE

The finished size of the sign.



20mm margins Keep all text and logos etc. inside this area to make sure nothing important gets cut off.

- Use CMYK colour profile
- □ If photos are used as part of the design, they need to be in high resolution, minimum 300dpi
- Leave a 20 mm margin on all edges to allow for fixings and/or eyelets
- □ Fonts should be embedded or preferably converted to curves
- Do not use PMS colours
- Use a breakdown of C20/M20/Y20/100K for rich black. Using just black (greyscale) results in a grainy print.
- Do not include colour profiles
- Do not include crop mark or registration marks
- 20 mm bleed
- □ If background is white use a thin black border (inc bleed) to show trim area
- □ Supply as a PDF file including bleed
- □ Supply at 100% size unless requested otherwise

**PRINT READY** files must be supplied to the above specifications. If the file does not meet the specifications a fee will be charged to make the file print ready.